

African Savannah Wall Hanging

By Adrienne Franklin

Finished Size: 45" x 45"

100 % cotton / 44-45" wide

Pattern Level: Advanced Beginner/ Intermediate
1/4" seam allowance used throughout and has been added.

Press carefully step-by-step. Read all instructions before beginning.



Materials Included:

1 Lion Pillow Panel or (14 5/8" square of fabric)
1/2 yard brown patch print
1/2 yard brown leopard spot
1 3/4 yards light leopard spot
2 3/4 yards gray leopard spot for backing and piecing
7/8 yard animal allover
3/4 yard gray patch print for binding and piecing

Materials Needed:

Piece of batting 49" x 49", matching thread, rotary cutter, ruler and mat, invisible thread (optional), clear template material.


Cutting:

From Lion Pillow panel cut:
1 pillow panel in a 14 5/8" square

From brown patch print cut:
A = 1 square 15 3/8" cut in half diagonally twice to equal 4 quarter square triangles.




From brown leopard spot cut:
BD = 20 squares 4 7/8" - mark each square at top center, then cut as shown to make 20 triangles.

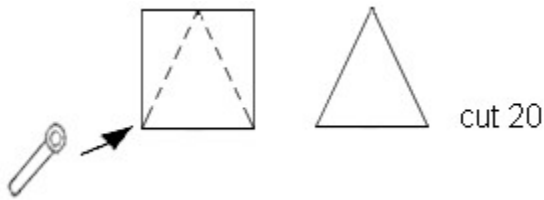

From light leopard spot cut:

BL = 16 squares $4 \frac{7}{8}$ " - mark each square at top center, then cut as shown to make 16 triangles.

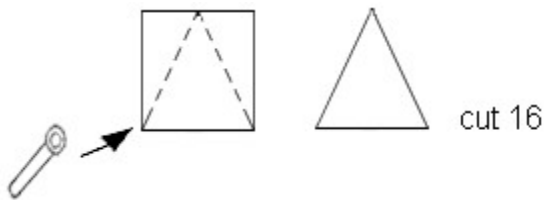


G = 4 rectangles $2 \frac{3}{4}$ " x $5 \frac{3}{8}$ " cut in half diagonally to form 8 half rectangles



C = 4 squares $4 \frac{1}{2}$ "

H = 60 squares $3 \frac{1}{2}$ " - mark each square at top center, then cut as shown to make 60 triangles.

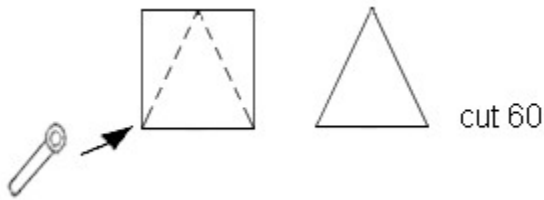

I = 2 squares $3 \frac{1}{2}$ " cut in half diagonally to make 4 half square triangles.




From allover animal print cut:


D = 4 squares $9 \frac{7}{8}$ " Note: to keep animals pointing in the right direction, it's helpful to refer to the photo and use a see through template to cut these squares. The edges of the squares will be on the bias and should be pinned and stitched carefully to prevent stretching.

From gray leopard spot cut:

J= 56 squares 3 1/2" - mark each square at top center, then cut as shown to make 56 triangles

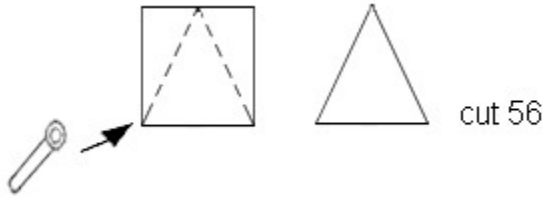

K= 4 rectangles 2"x 4" cut in half diagonally to make 8 half rectangles




From gray patch print cut:

L= 2 squares 3 1/2" cut in half diagonally to make 4 half square triangles




Assembly:

1) Sew one triangle A to each side of pillow panel as shown in **Figure 1**.

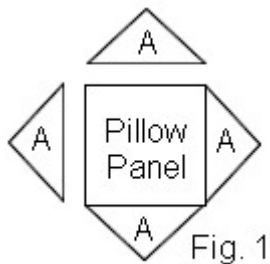

2) Sew 2 inner borders as shown, alternating 5 BD triangles and 4 BL triangles per border row. Sew 1 triangle - G to the end of each row as shown in **Figure 2**.

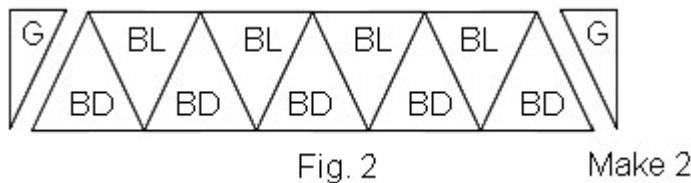

3) Sew remaining 2 inner borders as shown, alternating 5 BD triangles and 4 BL triangles per row. Sew 1 triangle G and 1 square C to each end of the border rows. See **Figure 3**.

7) For border corners, sew 4 gray triangle L to 4 light triangle I to make 4 triangle squares. See **Figure 7**.

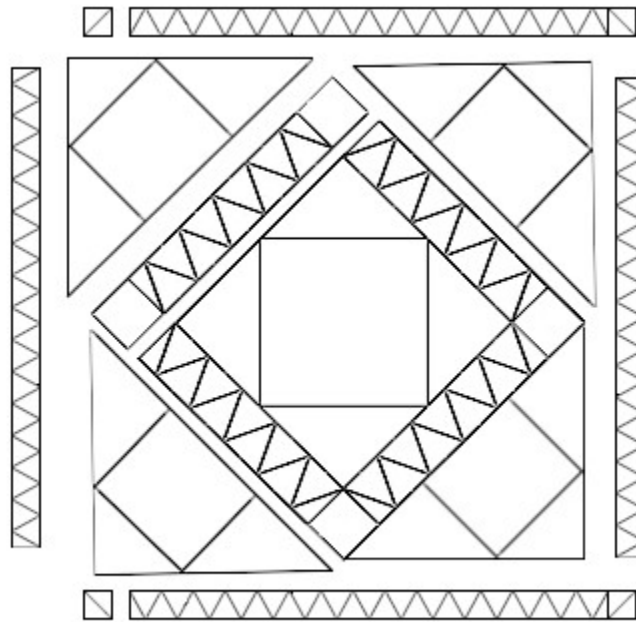


Fig. 7

8) For top and bottom borders sew 2 borders following step 6, except before sewing the borders to the quilt sew one border corner to the end of each of the 2 rows. Keep the dark triangle of the border corner toward the outside as shown in photo and assembly diagram. Sew to top and bottom of quilt. Quilt top is complete.

Finishing:

Cut batting and backing 2" larger than quilt top all around. Backing will need to be pieced. Assemble the "quilt sandwich" by placing the backing, batting, and top together in layers and baste or pin with safety pins. Machine or hand quilt as desired. When quilting is completed, trim excess batting and bind in the usual manner.



Assembly Diagram

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.