

# Welcome Spring Door Hanging

by Adrienne Franklin

**Finished size:** 28 1/2" x 33 1/2"

**Pattern Level:** Easy

**Seam Allowances:** 1/4" allowed and has been added unless otherwise noted. Press carefully step-by-step. Read all instructions before beginning.

## Materials needed:

5/8-yard small yellow print for appliques, background and top and bottom outer borders.

3/8-yard large yellow print for outer side borders.

3/8-yard medium green print for sashing and corner squares.

1 1/2-yards dark green tone on tone print for appliques, backing, and binding.

Piece of batting 31" x 36", wonder under or other paper backed fusible web, matching thread, monofilament thread (machine quilting



## Cutting:

### From small yellow print cut:

4 rectangles 9" x 11 1/2 "

2 strips 4 1/2" x 22 1/2" \* for top and bottom outer borders.

### From medium green print cut:

2 strips 1 1/2" x 11 1/2" for vertical sashing.

1 strip 1 1/2" x 18 1/2" for horizontal sashing.

2 strips 1 1/2" x 25 1/2" \* for side inner borders.

2 strips 1 1/2" x 22 1/2"\* for top and bottom inner borders.

4 squares 4 1/2" for corner squares

### From large yellow print cut:

2 strips 4 1/2" x 27 1/2" for top and bottom outer borders.


\* 2" has been added to the lengthwise measurement of these borders to allow for variance in size. Measure door-hanging top and trim borders before sewing.


## Assembly:


- 1) Trace letters and motifs onto the paper side of the fusible webbing allowing 1/4" space around each motif or letter. All letters and motifs are reversed and ready to trace. Cut out motifs roughly around edges and following manufacturer's instructions, fuse letters and motifs specified in photo to the wrong side of dark green print. Fuse 4 Tulip heads for border corners to the wrong side of small yellow print. Cut out motifs and letters along drawn lines, peel paper and fuse in place on background squares, border corners and upper border. Refer to photo and diagrams for placement. Letters should be staggered slightly for a whimsical look. Tip: To aid in placement of motifs use a light box or tape diagrams of motifs to a window, as they will appear in the hanging. Tape background rectangle on

- top of diagram and lightly trace outline of motifs with a pencil. After fusing motifs to background, stitch around motifs and letters using matching thread and a small open zigzag.
- 2) Referring to assembly diagram, piece blocks into 2 rows with vertical sashing in between. Join rows with horizontal sashing in between. Measure from top to bottom across center of quilt and cut side inner borders to this measurement. Sew to quilt. Measure across quilt from side to side and cut inner top and bottom borders to this measurement. Sew to quilt. Measure for outer side borders using the same method. Before sewing on side outer borders measure across center of the quilt from side to side and cut top and bottom borders to this measurement. Sew on side borders. Sew corner squares to each end of top and bottom borders as shown in assembly diagram. Sew these borders to quilt.
  - 3) Cut batting and backing 2" bigger than quilt top all around. Assemble the quilt "sandwich" by placing backing, batting and top together in layers and baste or pin with safety pins. Machine or hand quilt as desired. Bind in the usual manner.


While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.

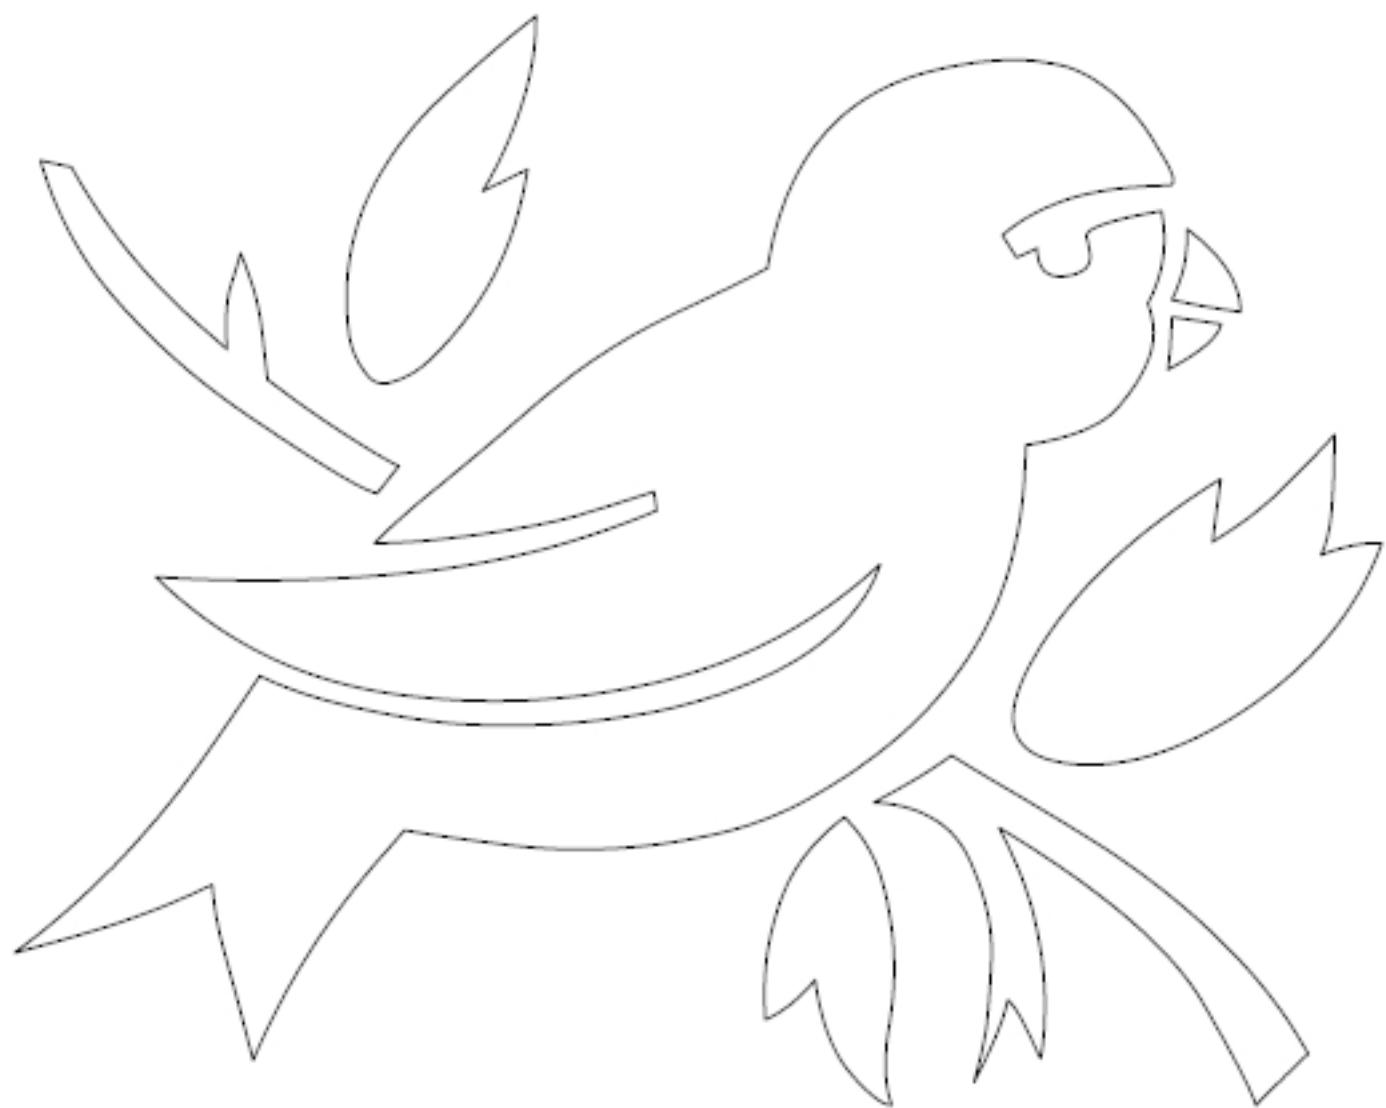


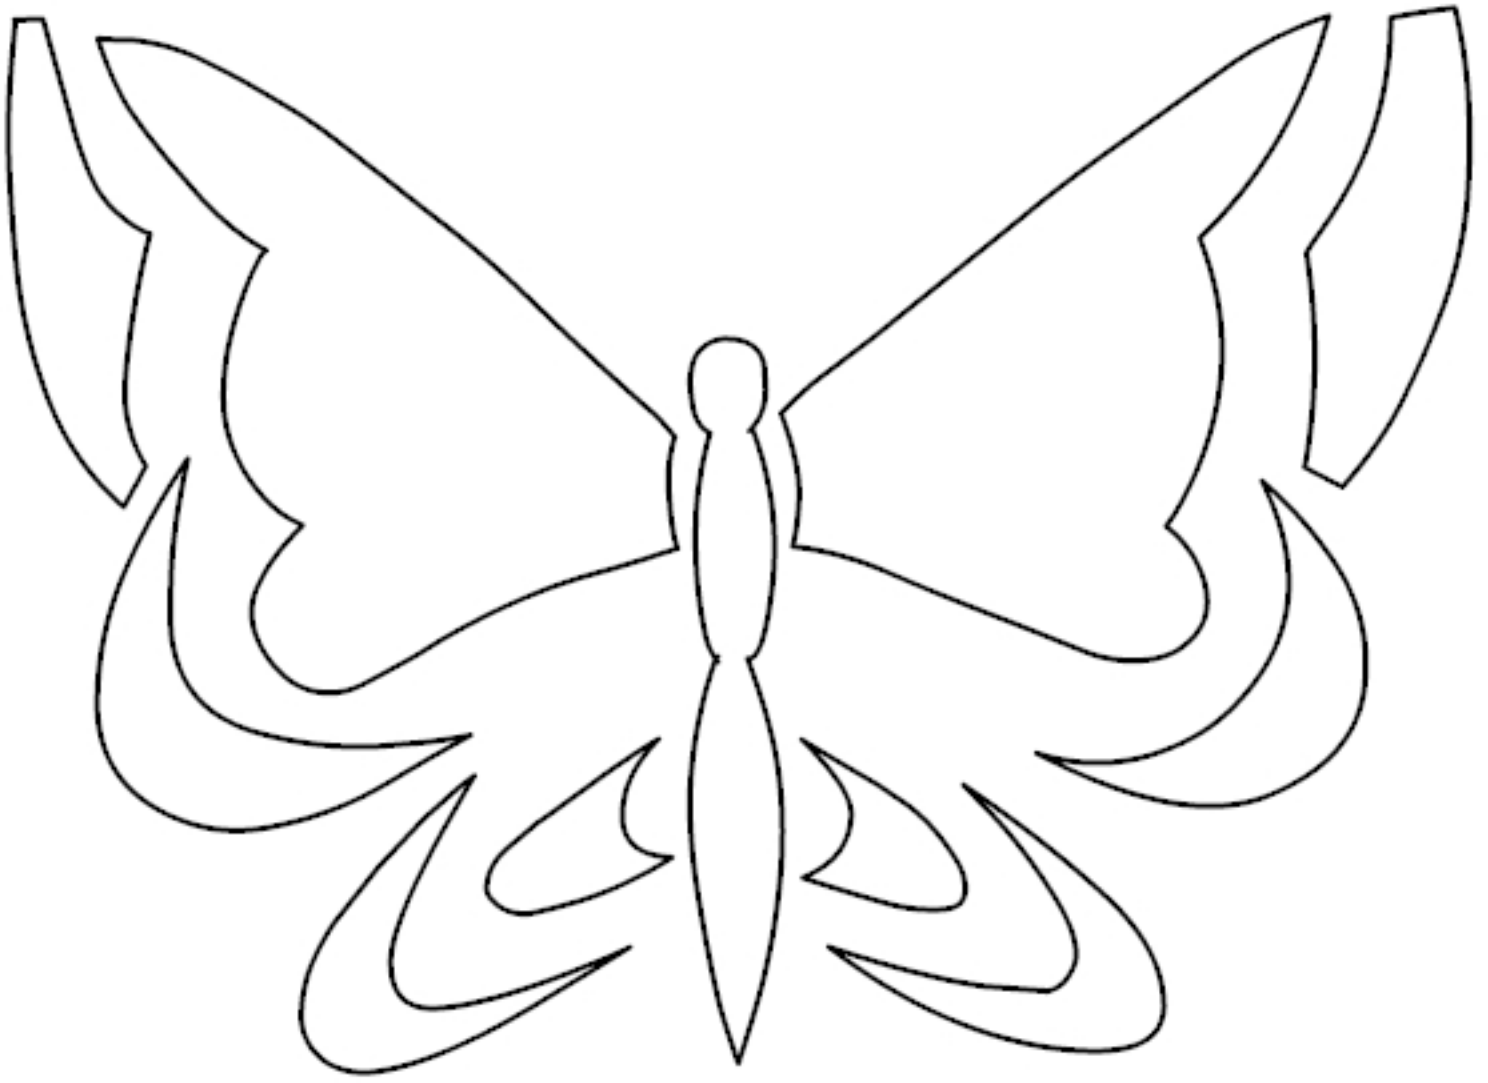

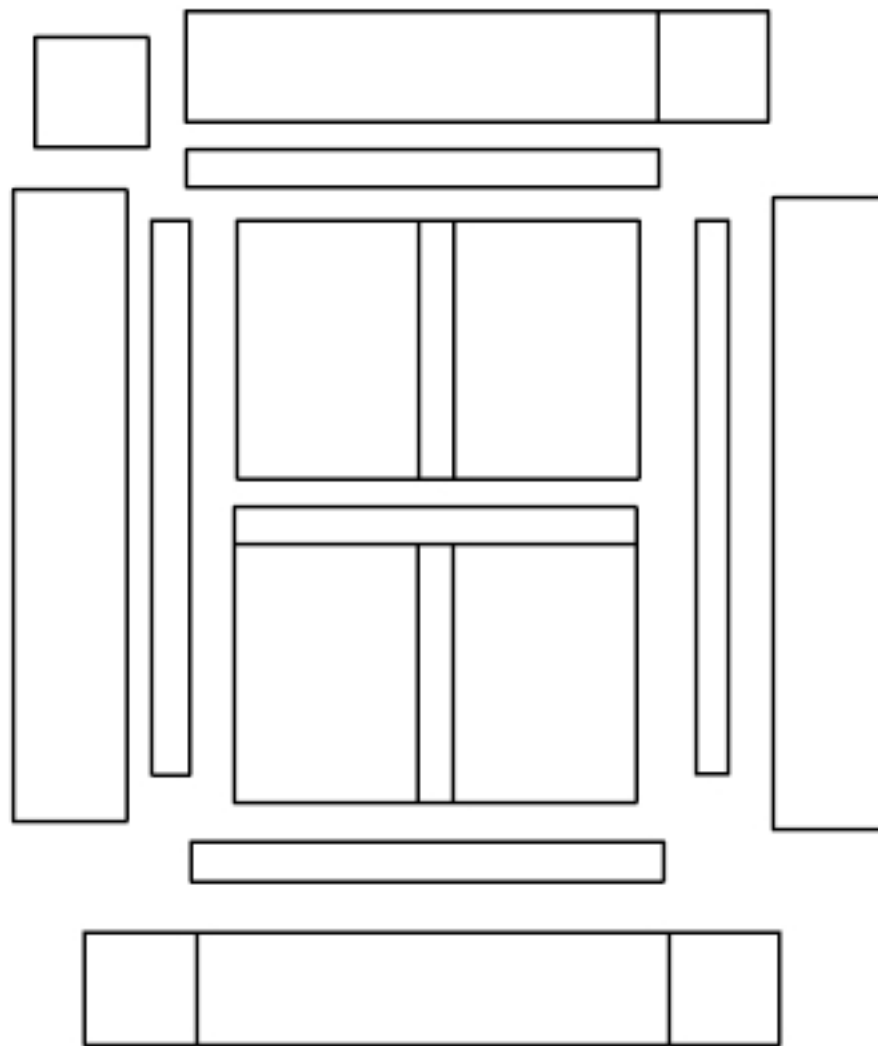

Assembly Diagram  
Welcome Spring  
Wall-hanging

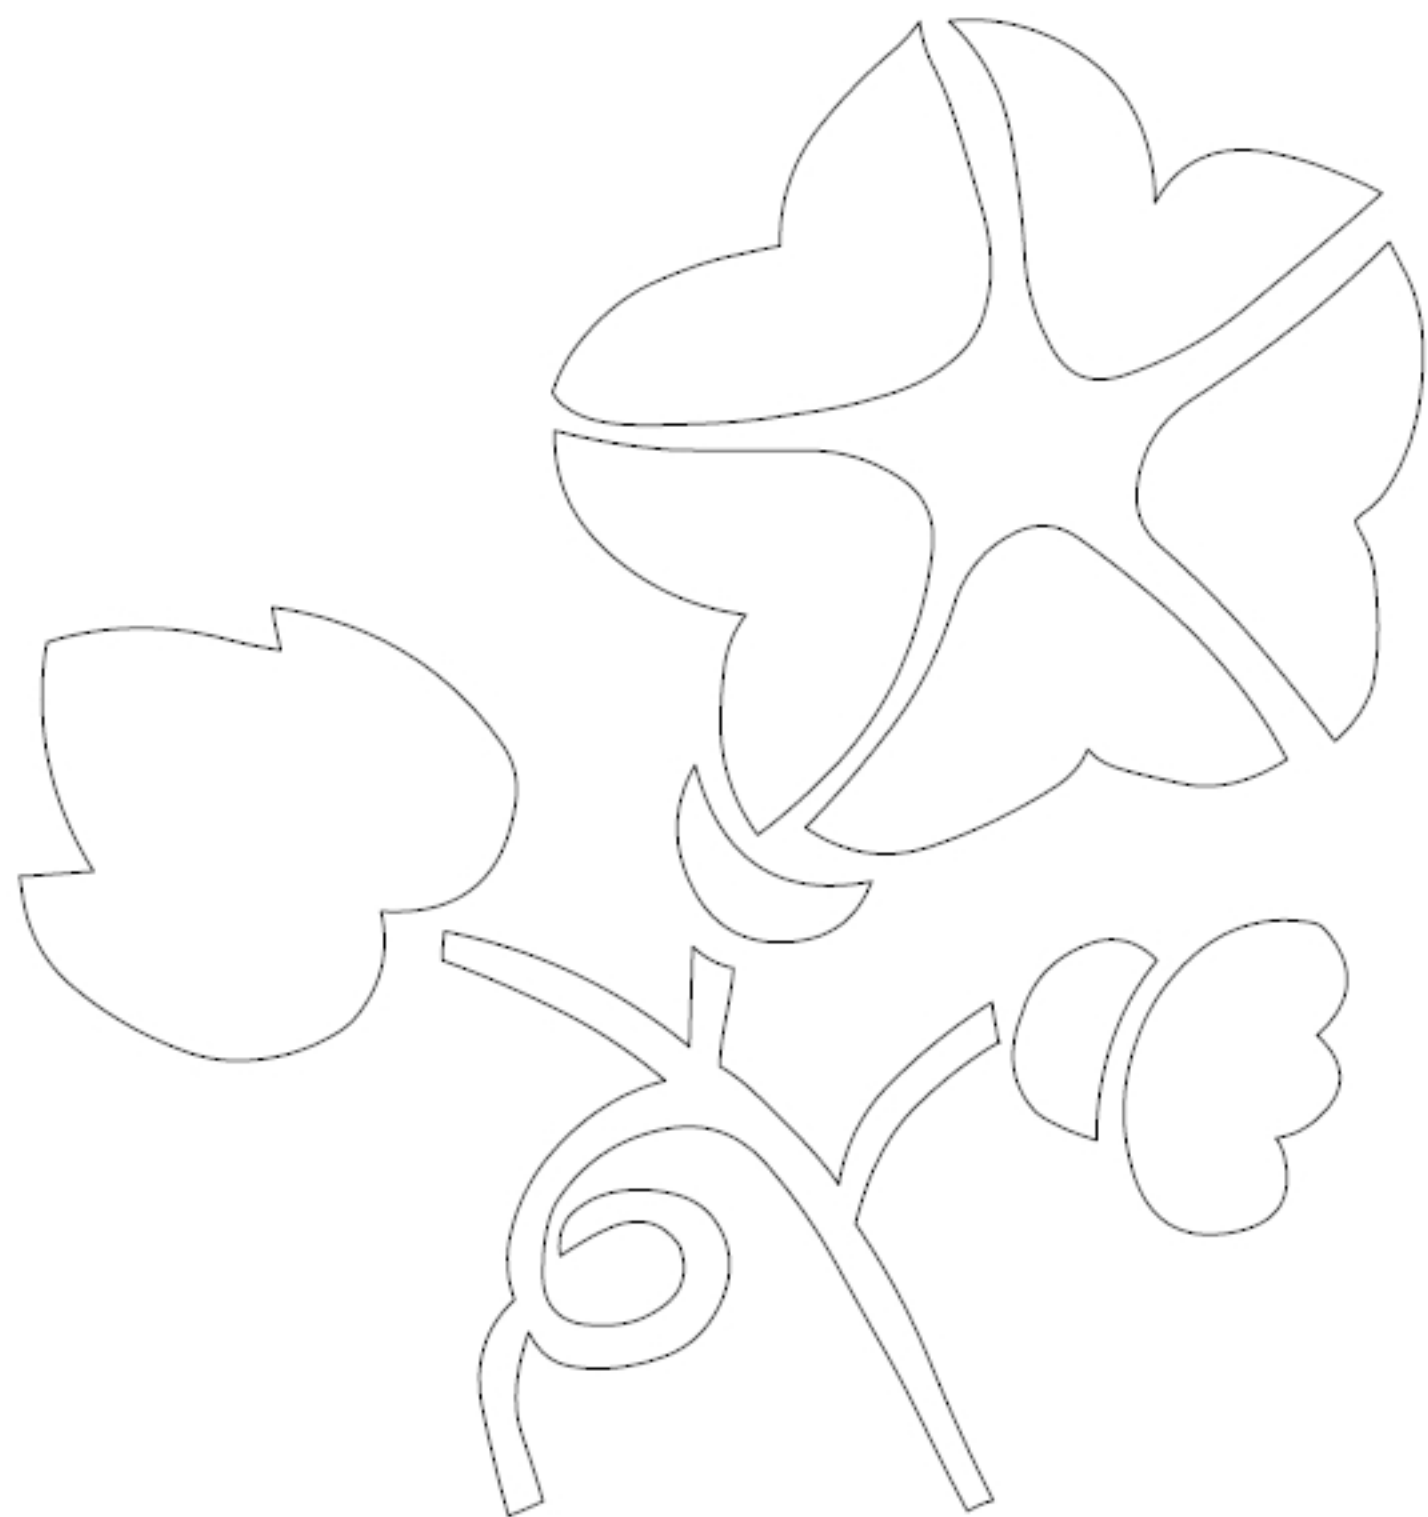

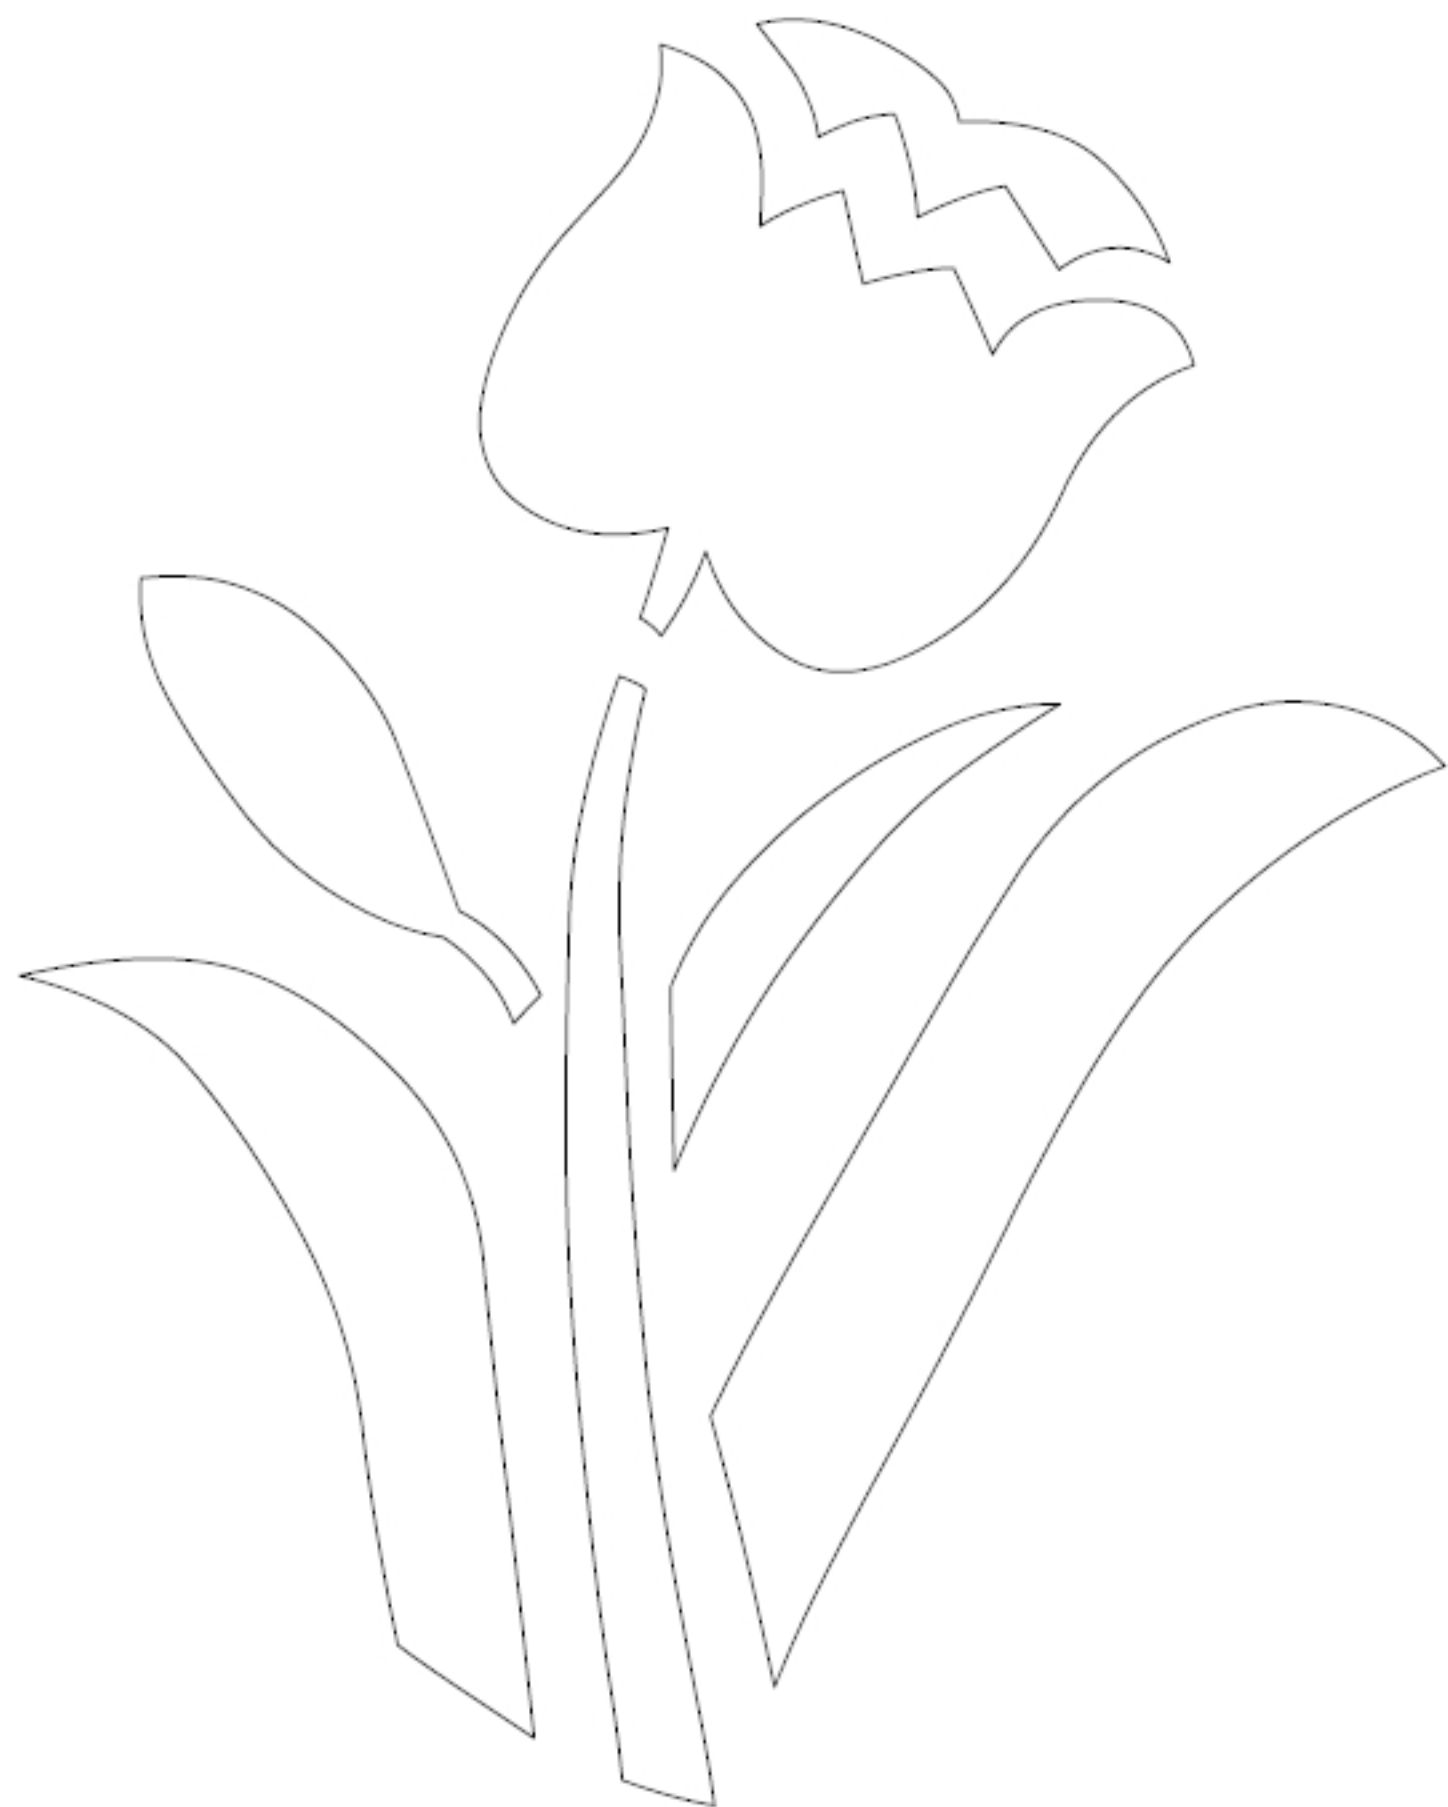

Spribe

Wesley come