

Rooster Tablecloth

by Adrienne Franklin

Finished size: 52" square- use as a tablecloth or as a topper

Pattern Level: Easy- some sewing experience helpful.

Seam Allowance: 1/4" used throughout and has been added unless otherwise indicated. Read all instructions before beginning. Press carefully step-by-step.



Materials Needed:

All fabrics used are from the Warren Kimble Rooster collection by VIP

1-yard Rooster pillow panel

3/8-yard tiny rooster all over

1 5/8-yard rooster in diamonds print

Matching thread

Cutting

Note: all prints are directional so use care when cutting and sewing.

From pillow panel cut:

1 square 36"

From rooster in diamonds print cut:

2 strips cut crosswise 9 1/4" x 36" for top and bottom borders

2 strips cut lengthwise 9 1/4" x 36" for side borders

From tiny rooster all over cut:

4 squares 9 1/4" for corners

Assembly

- 1) If you will be washing your tablecloth frequently, we recommend that you finish your seams with an overlock stitch or a zigzag stitch.

- 2) Sew side borders to center panel. See **Figure 1**. Sew corner squares to either end of top and bottom borders. Sew top and bottom borders to panel.

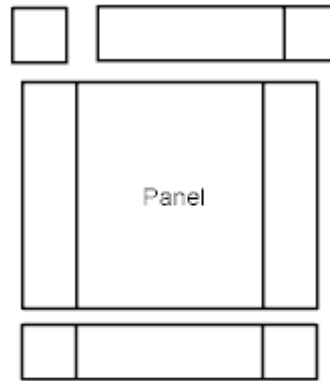


Fig. 1
Construction

- 3) Narrow hem edges by pressing under 1/4" along 2 of the sides. Then press under 1/4" again enclosing the raw edges. Stitch. Repeat for remaining 2 sides. See **Figure 2**.




Fig. 2
Hemming

Rooster Valance

by Adrienne Franklin

Size: Fits a 36" rod

Pattern Level: Easy

Seam Allowance: 1/4 " used throughout and has been added unless otherwise indicated. Press carefully step-by-step.

Materials Needed:

1 1/8-yards tiny rooster print by Warren Kimble for VIP
Matching thread



Cutting and Assembly

- 1) Cut 2 pieces 18" x 37 1/2". Sew pieces together right sides facing

along 1 short edge to form a long strip. Finish seam using a zigzag or overlock stitch and press to one side.

- 2) Narrow hem remaining short side edges by pressing under 1/4" then pressing under 1/4" again to enclose raw edges. Stitch.
- 3) To form bottom hem press under 1/2" along bottom edge, then press under another 2" to form hem. Stitch. See **Figure 1**.

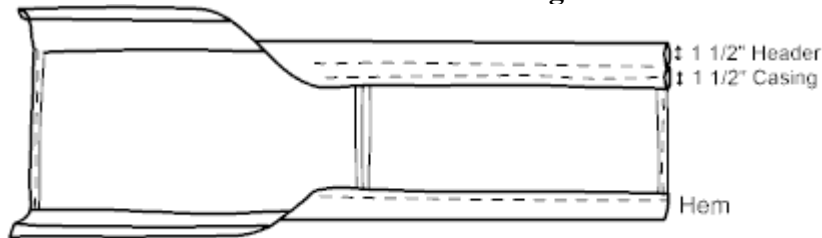


Fig. 1

- 4) Casing and header: press under 1/2" along top raw edge. Press under an additional 3" and stitch close to fold to enclose raw edges. See **Figure 1**. Mark and stitch 1 1/2" from top folded edge to complete header and casing.

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.