



VIP
by CRANSTON

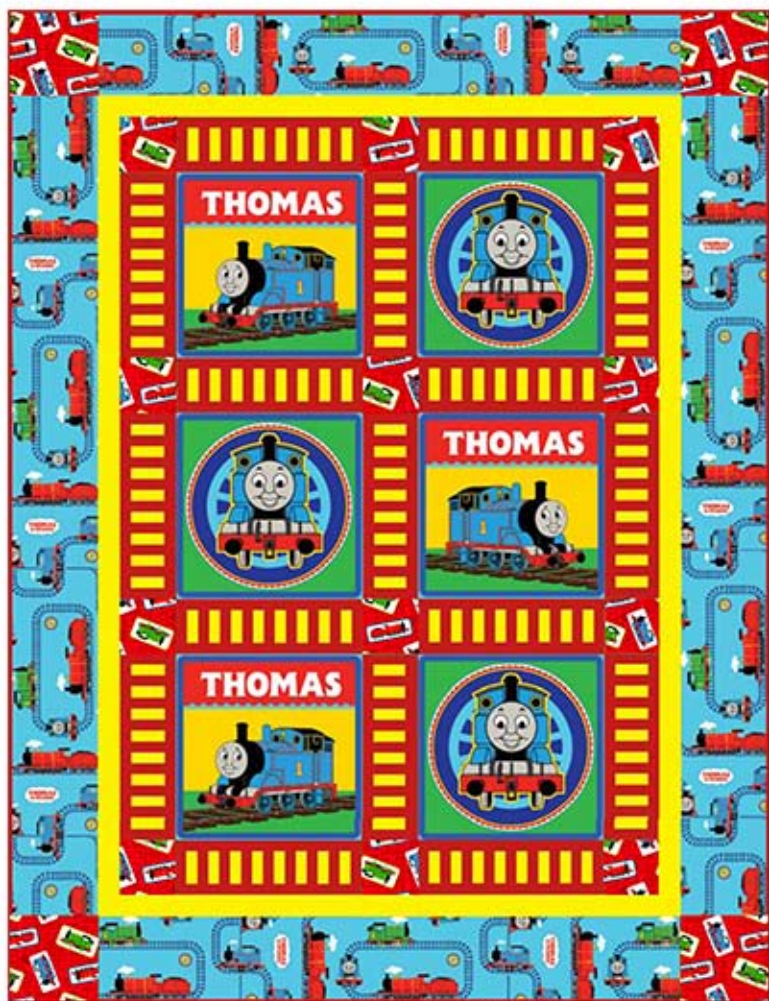

Approximate Finished Size: 69" x 91"



61836-B
1-1/2 yards




61837-B
3 yards



62345-R
3/4 yard



Red Solid
1-3/4 yards



Yellow Solid
1-3/4 yards

"Thomas & Friends"

Designed by Heidi Pridemore

Approximate Finished Size: 69" x 91"

Seam Allowances: Standard 1/4"

Preshrink all fabrics before starting.

Read all instructions before beginning. Press carefully step-by-step. Border measurements can vary, measure the quilt top before cutting border lengths.

Fabric Requirements:

Pillow Panels- 61836-B

1-1/2 yards

Outer Border- 61837-B

3 yards (Directional Border)

Corner Stones-62345-R

3/4 yard

Rails- Red Solid

1-3/4 yards

Rails- Yellow Solid

1-3/4 yards

Additional 5 yards of fabric of your choice is needed for the backing.

Assembly Instructions:

- 1) To make the Railroad Blocks, sew eight 1-1/2" x WOF Yellow strips and nine 1-1/2" x WOF Red strips together lengthwise, alternating the colors, starting with a red strip (fig. 1). Make two strip sets total.
- 2) Cut the two strip sets into seventeen 3-1/2" segments (fig. 2).
- 3) Sew one 1-1/2" x 17-1/2" Red strip to the top and bottom of each 3-1/2" strip segment (fig. 3). Make seven Railroad Blocks total.
- 4) For Horizontal Rows One, Three, Five and Seven, Sew three 5-1/2" Corner Stones and two Railroad Blocks together, starting with one 5-1/2" Corner Stone and alternating with the Railroad Blocks.
- 5) For Horizontal Rows Two, Four and Six. Sew three Railroad Blocks and two Panel Blocks together, starting with one Railroad block and alternating with the Panels.
- 6) Sew the rows together in numerical order to make the quilt top.
- 7) Sew one 2-1/2" x 71-1/2" Yellow Strip to each side of the quilt top.
- 8) Sew one 2-1/2" x 53-1/2" Yellow Strip to the top and bottom of the quilt top.
- 9) Sew one 8-1/2" x 75-1/2" Outer Border to each side of the quilt top.
- 10) Sew one 8-1/2" Corner Stone to each end of the two 8-1/2" x 53-1/2" Outer Border Strips to make the Top and Bottom Outer Borders.
- 11) Sew the top and Bottom Outer Borders to the quilt top.
- 12) Layer, quilt and bind as desired.

Cutting Instruction:

Fussy cut six panels 17-1/2" square.

Cut three 8-1/2" x width of fabric (WOF) strips and piece into two 8-1/2" x 53-1/2". Cut two 8-1/2" x 75-1/2" strips from the length of fabric. Cut twelve 5-1/2" squares and four 8-1/2" squares.

Cut eighteen 1-1/2" x WOF. Cut seventeen 1-1/2" x 18-1/2" strips. Cut eight 2-1/4" x WOF, piece together for Binding.

Cut sixteen 1-1/2" x WOF strips. Cut seven 2-1/2" x WOF strips and piece into two 2-1/2" x 71-1/2" and two 2-1/2" x 53-1/2".




Fig. 1



Fig. 2



Fig. 3

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.