

# CHRISTMAS WALLHANGING

by Janet Page © 1998

100% cotton - 44/45" Wide

Finished Size: 57" x 57"

Pattern Level: Easy but some piecing experience is necessary. 1/4" seam allowances are used throughout and have been added unless otherwise indicated.

Please press carefully step by step. Read through all instructions before beginning.



## Materials needed:

- 4 1/4 yards W6791-H (large print) for borders, backing and triangle D
- 1/2 yard W6790-H (pillow panel) for center
- 1 1/3 yards W6792-H (small allover floral) for triangle D, some extra yardage is added for lengthwise cutting
- 1/3 yard W6794-H (holly sprig) for center triangles A
- 1 1/3 yards W6795-D (rose scroll) for template B, triangle D, and border
- 1 1/3 yards W6795-H (green scroll) for template B, triangle D, and binding
- 1/4 yard W6793-H (stripe) for template C
- Twin-sized batting, threads to match

Please see overall [diagram #1](#) for cutting and piecing directions.

## Cutting Instructions

Please refer to the diagram and picture. The 4 "C" triangles in each corner are centered on edges of stripe. Borders are cut lengthwise. Triangle D can be strip pieced then cut out, or you can rotary cut strips using measurements on [diagram #1](#). If you make a large triangle, follow instructions on [diagram 1](#) and [2](#).

## Templates and/or Measurements for Rotary Cutting

- Pillow cut 11" x 11" square with 1/2" trim added on top and bottom. Side trim is cut 1" from pillow panel back. This center piece should now measure 12 1/2".
- Triangle A sides 8 1/2", base 12 1/2".

- Template B rectangle squares, cut 4 3/4" x 4".
- Triangle C for corner blocks, sides 5 1/2" x 7 1/2" base, center on stripe, optional small white flower appliqued in center.
- Triangle D large strip-pieced corner triangle, follow diagram for cutting. This triangle measures 24" base, sides 16 1/2". See diagram #2.
- Remaining measurements for borders are in cutting instructions and on diagram.

### **Tip - Buying Fabrics**


Always buy 1/8 or 1/4 yard more than is required. Yardages are calculated carefully but we all work differently and we all make errors from time to time. It is better to have a little extra (you can use it in other projects) than to go back to the shop to find it has sold out- frustration!

### **Assembly Instructions**

Follow diagrams--#3 assembly begins in center with pillow panel. Refer to piecing diagram. Add borders as illustrated, first sides then top and bottom. When top is complete with borders added you are ready to assemble and quilt your top. Cut batting and backing 2" larger than the top on each side to make the quilt "sandwich" by placing the backing, batting and top together in layers and baste or pin. Machine quilt with monofilament thread in needle and matching thread for backing in the bobbin. Quilt in all seam lines or as desired. When machine quilting is completed, trim edges with rotary cutter then bind in the usual manner.



Diagram 3

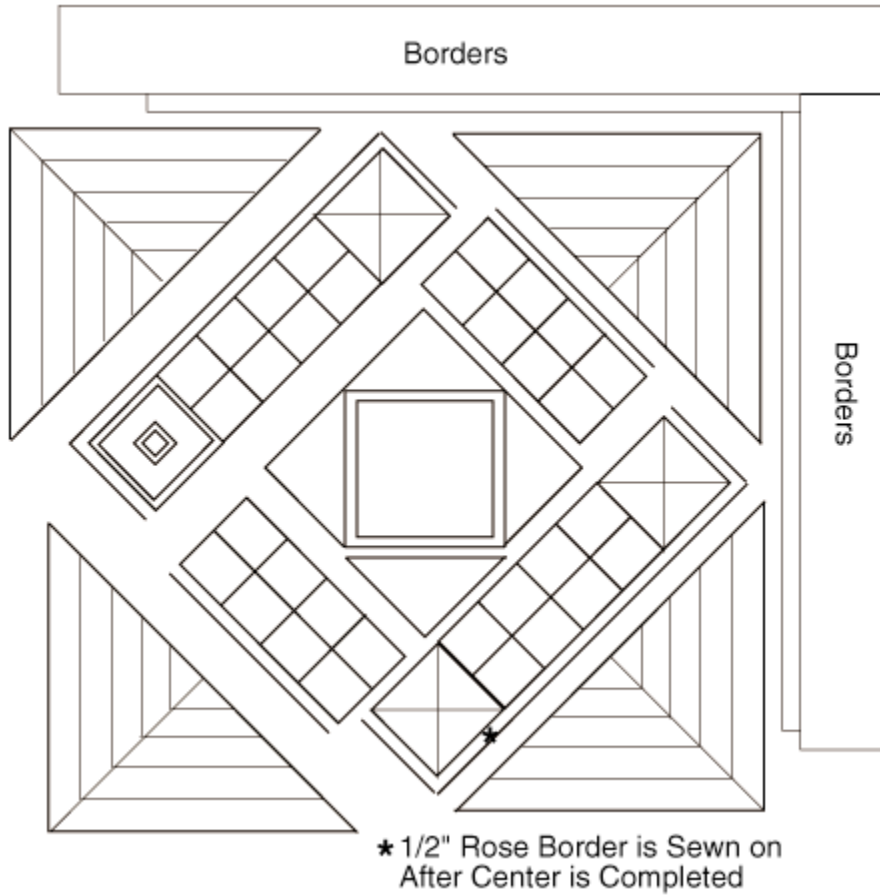

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.

©Cranston, a Division of ©Cranston Print Works Company  
[www.CranstonVillage.com](http://www.CranstonVillage.com)